


High Power Thick Film Chip Resistors

Features

- High power in standard size
- Suitable for both wave and reflow soldering
- Application: AV adapters, LCD back light, Camera strobe

Dimension

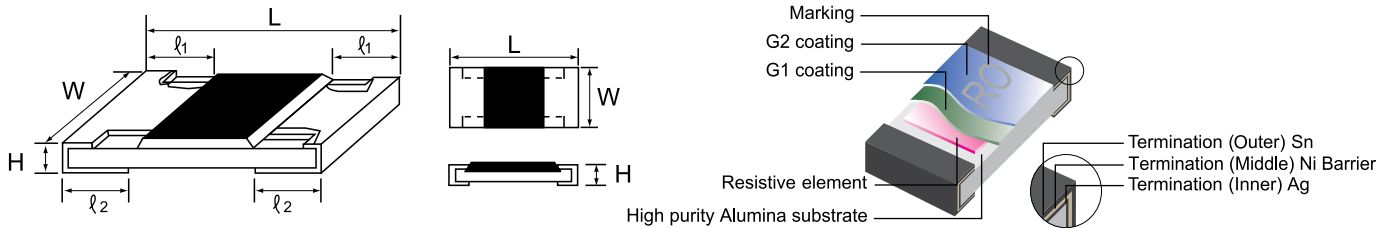

Type	Power Rating at 70°C	Max Working Voltage	Max Overload Voltage	Dielectric Withstanding Voltage	Tol %	Resistance Range	Dimension (mm)				
							L	W	H	l ₁	l ₂
HP02 (0402)	1/10W	50V	100V	100V	±1% ±5%	1Ω ~10MΩ 1Ω ~10MΩ	1.00±0.10	0.50±0.05	0.35±0.05	0.20±0.10	0.25±0.10
HP03 (0603)	1/5W	50V	100V	300V	±1% ±5%	1Ω ~10MΩ 1Ω ~10MΩ	1.60±0.10	0.80 ^{+0.15} -0.10	0.45±0.10	0.30±0.20	0.30±0.20
HP05 (0805)	1/3W	150V	300V	500V	±1% ±5%	1Ω ~10MΩ 1Ω ~10MΩ	2.00±0.15	1.25 ^{+0.15} -0.10	0.55±0.10	0.40±0.20	0.40±0.20
HP06 (1206)	1/2W	200V	400V	500V	±1% ±5%	1Ω ~10MΩ 1Ω ~10MΩ	3.10±0.15	1.55 ^{+0.15} -0.10	0.55±0.10	0.45±0.20	0.45±0.20
HP07 (1210)	3/4W	200V	500V	500V	±1% ±5%	1Ω ~10MΩ 1Ω ~10MΩ	3.10±0.10	2.60 ^{+0.15} -0.10	0.55±0.10	0.50±0.20	0.50±0.20
HP10 (2010)	1W	200V	500V	500V	±1% ±5%	1Ω ~10MΩ 1Ω ~10MΩ	5.00±0.10	2.50±0.15	0.55±0.10	0.60±0.25	0.50±0.20
HP12 (2512)	2W	250V	500V	500V	±1% ±5%	1Ω ~10MΩ 1Ω ~10MΩ	6.35±0.10	3.20±0.15	0.55±0.10	0.60±0.25	0.50±0.20

Note:


- 1.) Standard Operating Temp (°C): -55 ~+155 2.) Standard : E-96 series : 1% & E-24 series : 5%
- 2.) HP12 1Ω ~ 10MΩ Low TCR available case by case on basis.
- 3.) HP low resistance range : 0.1Ω ~ 1Ω available,
TCR for HP03, HP05 at +/-200ppm°C, HP06 ~ HP12 at +/-100ppm°C,
Electrical performance same as above.

Extra High Power Thick Film Chip Resistors


Features

- High power in standard size
- Suitable for both wave and reflow soldering
- Application: AV adapters, LCD back light, Camera strobe

Dimension

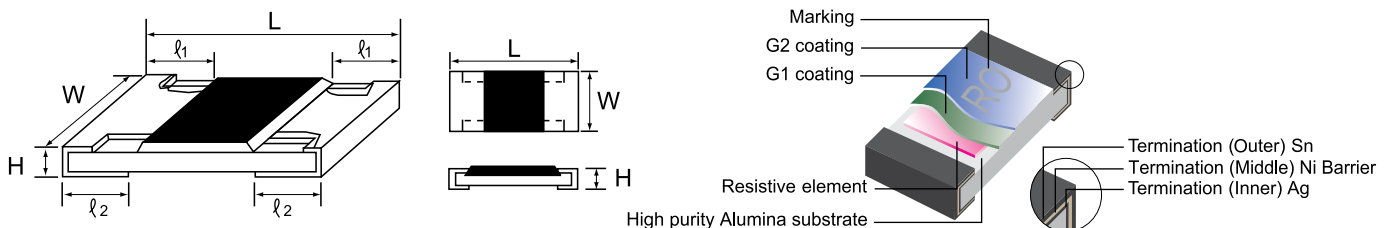

Recommended solder pad



Size	A Width (mm)	B Pad (mm)	C Spacing (mm)
HP12 SP12	3.70	2.80	2.70

4 layers PCB specification:

- 1) Outside 2 layers (Top and Bottom) with copper foil thickness at 2oz.
- 2) Inside 2 layers (Middle layers) with copper foil thickness at 4 oz.

Type	Power Rating at 70°C	Max Working Voltage	Max Overload Voltage	Dielectric Withstanding Voltage	Tol %	Resistance Range	Dimension (mm)				
							L	W	H	l ₁	l ₂
SP12 (2512)	3W	250V	500V	500V	±1% ±5%	1Ω~10MΩ 1Ω~10MΩ	6.35±0.10	3.20±0.15	1.10±0.10	0.60±0.25	1.80±0.20

