

Wire-Wound Fixed Resistors

Performance Specification

Temperature Coefficient	<20Ω: ±400PPM/°C; ≥20Ω: ±300PPM/°C
Short Time Overload	±(2.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Dielectric Withstanding Voltage	No evidence of flashover, mechanical damage, arcing or insulation breakdown.
Pulse Overload	±(5.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Terminal Strength	No evidence of mechanical damage.
Resistance to Soldering Heat	±(1.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Solderability	Min. 95% coverage.
Temperature Cycling	±(2.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Load Life in Humidity	±(5.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Load Life	±(5.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Non-Flame	No evidence of flaming or arcing.
Surge Immunity (IEC 61000-4-5)	±(5.0% + 0.05Ω)Max


Ordering Procedure: Ex.: KNP 1W, +/-5%, 100Ω , T/B-1000

K	N	P	0	1	W	J	0	1	0	1	A	1	0
Type: KNP = KNP KNH = KNH KNS = KNS			Feature: 0 = Standard U = UL Approved  A = Anti-Surge S = Special / Customized (For KNP Type only) I = Non-Inductive	Wattage: Normal W2 = 1/2W 1W = 1W 9W = 9W AW = 10W A0 = 100W Small 1S = 1W-S 9S = 9W-S AS = 10W-S Extra Small 1U = 1W-SS 2U = 2W-SS 3U = 3W-SS 4U = 4W-SS AU = 10W-SS			Resistance Value: - E-24 series: 1st digit is "0" 2nd & 3rd digits are significant figures of the resistance 4th indicates the number of zeros "J" ~ 0.1, "K" ~ 0.01 Ex. 4.7Ω ~ 47J, 4.7KΩ ~ 472 - E-96 series: 1st to 3rd digits are significant figures of the resistance and the 4th digit indicates the number of zeros. Ex.: 1.33KΩ = 1331			Packing Type: A = Tape/Box T = Tape/Reel B = Bulk/Box			
							Packing Qty: 1 = 1,000 pcs. 2 = 2,000 pcs. A = 500 pcs. B = 2,500 pcs. (for T/R) 0 = Bulk/Box						
				Tolerance: F = ±1% G = ±2% J = ±5% K = ±10%						Additional Information: (for KNP,KNS,KNH,KNHA Type B/B pack only) 0 = NIL (for KNP Type Only) 0 = PT-52mm 8 = PT-58mm 9 = PT-64mm C = PT-73mm			


Wire-Wound Fixed Resistors

Features

- Color coating Is "Green"
- Non-inductive type available
- Excellent flame resistance
- Too low or too high ohmic value can be supplied on a case to case basis
- Special Fusing Wire-Wound Resistors can be supplied on a case to case basis

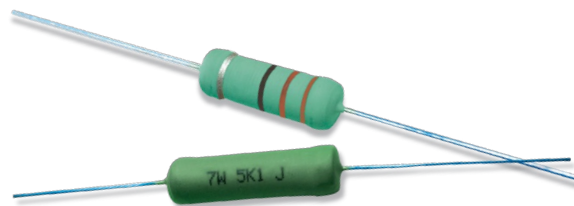

Standard : 2% ,5% ,10% -- E - 24 series
1% -- E - 96 series

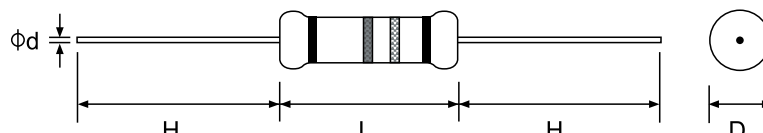

Part No.	Style	Power Rating at 70°C	Dimension (mm)					Low Resistance Range	Standard Resistance Range	High Resistance Range
			D±1	L±1	H±3	d±0.05	PT			
Normal Size										
KNP0W2	KNP 50	1/2W (0.50W)	3.5	10.0	28	0.54	52	0.06Ω~9.9Ω	10Ω~39Ω	40Ω~560Ω
KNP01W	KNP 100	1W	5.0	12.0	25	0.70	52	0.10Ω~9.9Ω	10Ω~50Ω	51Ω~1KΩ
KNP02W	KNP 200	2W	5.5	16.0	28	0.70	64	0.15Ω~9.9Ω	10Ω~120Ω	121Ω~2KΩ
KNP03W	KNP 300	3W	6.5	17.5	28	0.75	64	0.25Ω~9.9Ω	10Ω~200Ω	201Ω~3KΩ
KNP05W	KNP 500	5W	8.5	25	38	0.75	B/B	0.50Ω~9.9Ω	10Ω~470Ω	471Ω~5KΩ
KNP07W	KNP 700	7W	8.5	30	38	0.75	B/B	0.65Ω~9.9Ω	10Ω~470Ω	471Ω~6KΩ
KNP08W	KNP 800	8W	8.5	40	38	0.75	B/B	1.0Ω~9.9Ω	10Ω~1.5KΩ	1.6KΩ~10KΩ
KNP09W	KNP 900	9W	8.5	53	38	0.75	B/B	1.0Ω~9.9Ω	10Ω~1.5KΩ	1.6KΩ~15KΩ
Small Size										
KNP01S	KNP 100-S	1W	3.5	10.0	28	0.54	52	0.06Ω~9.9Ω	10Ω~39Ω	40Ω~560Ω
KNP02S	KNP 200-S	2W	5.0	12.0	25	0.70	52	0.10Ω~9.9Ω	10Ω~50Ω	51Ω~1KΩ
KNP03S	KNP 300-S	3W	5.5	16.0	28	0.70	64	0.15Ω~9.9Ω	10Ω~120Ω	121Ω~2KΩ
KNP05S	KNP 500-S	5W	6.5	17.5	28	0.75	64	0.25Ω~9.9Ω	10Ω~200Ω	201Ω~3KΩ
KNP07S	KNP 700-S	7W	8.5	25	38	0.75	B/B	0.50Ω~9.9Ω	10Ω~470Ω	471Ω~5KΩ
KNP08S	KNP 800-S	8W	8.5	30	38	0.75	B/B	0.65Ω~9.9Ω	10Ω~470Ω	471Ω~6KΩ
KNP09S	KNP 900-S	9W	8.5	40	38	0.75	B/B	1.0Ω~9.9Ω	10Ω~1.5KΩ	1.6KΩ~10KΩ
KNP0AS	KNP 1000-S	10W	8.5	53	38	0.75	B/B	1.0Ω~9.9Ω	10Ω~1.5KΩ	1.6KΩ~15KΩ
Extra Size										
KNP01U	KNP 100-SS	1W	3.0	9.0	28	0.54	52	0.10Ω~9.9Ω	10Ω~39Ω	40Ω~180Ω
KNP02U	KNP 200-SS	2W	3.5	10.0	28	0.54	52	0.10Ω~9.9Ω	10Ω~39Ω	40Ω~220Ω
KNP03U	KNP 300-SS	3W	5.5	13.5	28	0.70	64	0.20Ω~9.9Ω	10Ω~50Ω	51Ω~620Ω
KNP04U	KNP 400-SS	4W	5.5	16.0	28	0.70	64	0.20Ω~9.9Ω	10Ω~120Ω	121Ω~750Ω
KNP0AU	KNP 1000-SS	10W	8.5	40	38	0.75	B/B	1.0Ω~9.9Ω	10Ω~1.5KΩ	1.6KΩ~5KΩ
KNP03T	KNP 300-SSS	3W	4.5	11	25	0.70	52	0.10Ω~9.9Ω	10Ω~50Ω	51Ω~1KΩ

Note: For KNP Series Max. Working Voltage: 500V
 Max. Overload Voltage: 1,000V
 Dielectric Withstanding Voltage : Dimension ≤ 3.5 x 10 : 350V
 > 3.5 x 10 : 500V